

Paño *la* feltina®

TEXTIL OLIUS, S. A.

Paño ^{la}

feltina[®]

Fieltro de lana que se fabrica en tres calidades distintas con una amplia gama de colores.

CUALIDADES

Se corta con facilidad en cualquier dirección sin peligro de deshilacharse. En la confección se adapta a las novedades que imponga la moda y no precisa forro.

ADVERTENCIAS

Lavar en seco.
Planchar al mínimo de calor y humedad.
Cosér con punto largo.

USOS

Moda y confección: Se destina principalmente a prendas infantiles y trajes regionales.
Decoración y diseño: Escaparates, cortinajes, forro de plafones y paredes.
Hogar: Almohadones, colchas, fundas para mesas camillas, caminos de mesa, tapetes, fundas o forro de cajones.
Artesanía: Letras y números, flores, banderines, escudos, posters.
Juguetería: Muñecos, didácticos, disfraces, tapetes de juego. Y un sinfín de aplicaciones más por la gran calidad del artículo.

Wool felt, manufactured in three different grades and a large range of colour tones, as shown in these samples. Excellent draping qualities and a pleasant hand.

FEATURES

Easily cut in any direction without danger of unravelling. Excellent adaptability to fashion's constant demands. No lining required.

CAUTIONS

Dry clean only.
Use cool and dry iron.
Sew with large stitch.

USES

Fashion and clothing: Principally used for children's clothing and for regional costumes.
Decoration and design: Window displays, drapes, panels and wall linings.
Home decoration: Cushions, bedspreads, table coverings and runners, carpet rugs and drawer liners.
Crafts: Letters and numbers, flowers, flags, shields, posters.
Toys: Stuffed animals, educational toys, costumes, play rugs... Plus an endless variety of uses which take advantage of this high quality article.

Solidez al frote en seco en todos los colores:
4/5 Resultado excelente (máximo 5).

Solidez al frote en húmedo en todos los colores:
3/4 Bien (máximo 5). (UNE-EN ISO 105-x12)

La última cifra de la referencia del color, indica la solidez a la luz: 3/4 Regular. 5/6 Buena. 7/8 Muy Buena (máximo 8) (UNE-EN ISO 105-B02/OU)

Rubbing resistance on dry state, on all Feltina colours:
4/5 Excellent result (max. 5).

Rubbing resistance on damped state, on all Feltina colours:
3/4 Good result (max. 5). (UNE-EN ISO 105-x12)

The last number of each colour indicates colour fastness to light: 3/4 Regular. 5/6 Good. 7/8 Very good (max. 8) (UNE-EN ISO 105-B02/OU)

Índice situación colores - Index situation colours

Color Colour	Línea Line	Color Colour	Línea Line	Color Colour	Línea Line	Color Colour	Línea Line	Color Colour	Línea Line	Color Colour	Línea Line	Color Colour	Línea Line
2	1	16	3	*32	1	*48	5	65	5	81	2	96	5
*5	5	17	4	*34	1	*49	6	66	6	82	4	*98	7
*6	3	18	5	*35	2	51	2	*67	7	*83	1	*103	1
*7	6	*20	6	36	2	53	6	68	5	*84	2		
*9	7	*24	4	37	3	55	3	69	7	*86	5		
*10	2	*25	5	*38	4	*58	1	*72	2	87	1		
*11	3	*26	6	*39	5	*59	2	*73	4	90	6		
*12	4	*27	4	*40	6	*60	3	*74	4	91	1		
13	2	*28	5	*41	7	61	4	*75	6	92	3		
14	3	*29	3	42	2	*62	6	*77	3	93	1		
15	2	30	7	45	3	64	4	*78	1	94	1		

1



*103/7-8



91/6-7



93/7-8



94/7



*83/5

2



42/6



81/6-7



15/7-8



51/7



*10/4-5

3



92/6-7



55/6-7



16/6-7



45/6-7



*11/4

4



64/6



82/6-7



17/7-8



61/4-5



*12/4

5



65/6-7



*48/6



18/7



96/4



68/6-7

6



66/7



*49/6



*20/7-8



90/3-4



53/6-7

7



*67/7



*9/7-8



69/7



2/4-5




87/3



*78/6



*32/3-4



*34/4



*58/3



*72/3




36/3



*84/7



13/4-5



*35/4



*59/3



*6/4



37/3



*77/7



*29/3



14/4



*60/6



*73/3-4



*38/5-6



*74/4



*24/3-4



*27/5




*5/3



*39/4-5




*86/3-4



*25/6-7



*28/6-7



*7/4



*40/7




*75/2-3



*26/5



*62/6-7



*41/6-7



*98/4-5



30/4-5



Paño ¹/_a

Muestras de calidad
Quality samples



feltina[®]

100% lana-wool

Colores: con asterisco*

Ancho piezas: 160 cms. - Espesor: 1,2 mm.

Largo piezas: 38 m. aprox.

Composición: 100% lana

Peso: 400 grs/ml.±7%

Para colores, gramajes y anchos especiales, se ruega consultar.

*Colours: in colour card with**

Width: 160 cms. - 63"

Thickness: 1,2 mm. - 3/64"

Roll length: 38 m. approx. - 42 yds.

Composition: 100% wool

Weight: 400 grs/lm.±7% - 13 oz/lyd.

For special colours, weights and widths, please ask for information.



feltina[®]

60% lana-wool

40% viscosa-viscose

Colores: sin asterisco

Ancho piezas: 160 cms. - Espesor: 1,1 mm.

Largo piezas: 38 m. aprox.

Composición: 60% lana - 40% viscosa

Peso: 400 grs/ml.±7%

Para colores, gramajes y anchos especiales, se ruega consultar.

Colours: without in colour card*

Width: 160 cms. - 63"

Thickness: 1,1 mm. - 3/69"

Roll length: 38 m. approx. - 42 yds.

Composition: 60% wool-40% viscose

Weight: 400 grs/lm.±7% - 13 oz/lyd.

For special colours, weights and widths, please ask for information.



Deco3

Colores: 9-16-29-59-67-82-83-90

Ancho piezas: 183 cms. - Espesor: 3 mm.

Composición: 100% lana

Peso: 750 grs/m²

POSIBILIDAD DE TRATAMIENTOS:

- IGNIFUGADO • HIDROFUGADO • ANTI-MOHO
- ANTI-PILING • ANTI-ESTÁTICO • ANTI-MANCHAS
- ANTI-POLILLA

Para los tratamientos, otras calidades y espesores, se ruega consultar.

Colours: 9-16-29-59-67-82-83-90

Width: 183 cms. - 72" - Thickness: 3 mm. - 1/8"

Composition: 100% wool

Weight: 750 grs/m² ±7% - 24,37 oz/lyd

POSSIBLE TREATMENTS:

- FLAME RETARDANT • WATER REPELLENT
- ROT PROOF • ANTI-PILLING • STAIN PROOF
- MOTH PROOF

For treatments, other qualities and thickness, please ask for information.



A-270

TEXTIL OLIUS, S. A.



201/4



215/5



223/6



236/4



235/4



214/4



237/5



216/6



240/6



220/5



209/4



225/5



243/4



232/6



224/6



233/4



210/4



231/4



205/6



208/5



242/6



219/3



244/4



229/5



206/6



238/5



217/2



221/5



211/4



226/5



207/6



239/5



218/3



234/5



212/5



227/4



228/3



241/5



204/5



230/3



202/2




203/3

A-270/250

A-270/300

A-270/350

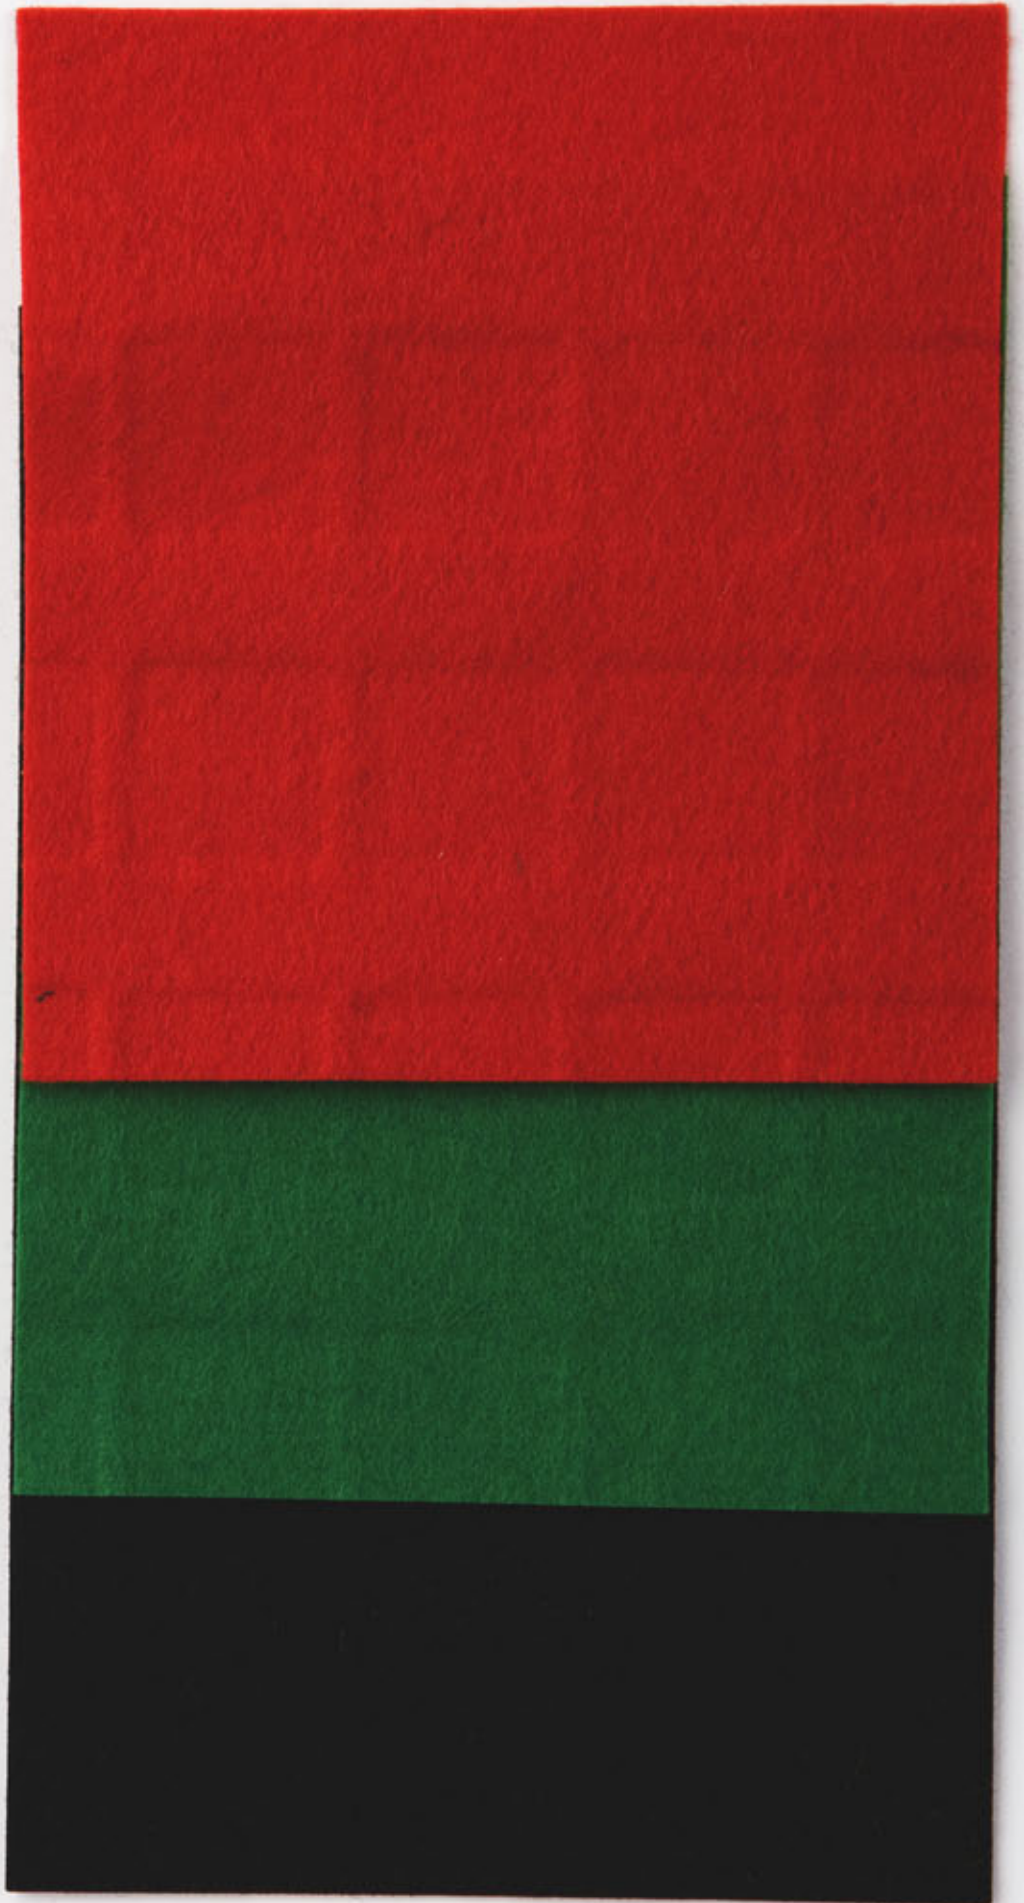

Especificaciones técnicas / Characteristics

Composición / Composition: 40% lana / wool - 60% viscosa / viscose

Peso/Weight	Longitud piezas/length rolls	Ancho/Width
250 gr/ml.	57 m	180 cm
300 gr/ml.	53 m	
350 gr/ml.	45 m	

Solidez del color a la luz artificial / Colour fastness to artificial light:

La última cifra del color indica el grado de solidez

The last number of each colour shows its colour fastness to light

2 - 3	media / medium
4 - 5	buena / good
6	muy buena / very good

Conforme con la norma UNE EN ISO 105-X12

According to UNE EN ISO 105-X12:

Resistencia al fuego según norma Europea EN 71 / Fire resistance according to European EN 71 specifications

Recomendaciones / Suggestions:

- Lavar en seco / Dry clean only
- Planchar a baja temperatura y humedad / Press using low temperature and moisture
- Coser con puntada larga / Sew with large stitch

Otras posibilidades / Other possibilities:

Colores, anchos y pesos especiales (mínima cantidad requerida) / Colours, widths and weights (minimum quantity required)

- Tratamientos / Treatments:**
- Ignífugo / Flameretardent
 - Antipolilla / Mothproof
 - Antimoho / Rotproof
 - Antisudor / Sweatproof
 - Hidrófugo / Water repellent
 - Antioxidante / Rustproof

TEXTIL OLIUS, S. A.

Oficinas Centrales / Head Office

C/. Orient, 78-84, 2ª Planta 16-17

08172 Sant Cugat del Vallès - Barcelona (Spain)

Tel.: +34 935 831 704 - Fax: +34 935 831 793

Dto. Comercial / Domestic Sales

Tel.: +34 902 365 750 - Fax: +34 937 276 079

e-mail: ventas@textilolius.com

Dto. Internacional / International Department

Tel.: +34 935 831 705 - Fax: +34 935 831 793

e-mail: international@textilolius.com

www.textilolius.com



TEXTILES
DE CONFIANZA

Test sustancias nocivas
según Öko-Tex Standard 100
Informe N° 990585 AITEX